



# SPACEPAC

INDUSTRIES Pty. Ltd.

PO Box 1468 Auburn St. Wollongong NSW 2500  
Phone: 1300 763 444 Fax: +61 2 4226 2208  
Email: sales@spacepac.com.au ABN 98 002 454 462  
WWW.SPACEPAC.COM.AU

## GLASS LIFTER-GL

# Perfect for vertical and overhead glazing!




KSF-Model	GL-550	GL-700	GL-850
Max. Load capacity	300 KG	300 KG	300 KG
Basic height	2.15 m	2.15 m	2.15 m
Lifting height	5.5 m	7 m	8.5 m
Weight	226 KG	247 KG	268 KG



## GLASS LIFTER-GL

The KSF Glass Lifter is a compact electric glass lifter for the vertical and overhead glazing.

It is an autonomous device supplied with a battery and with its equipment can also function as a multi-purpose material lift for a construction site or a workshop.

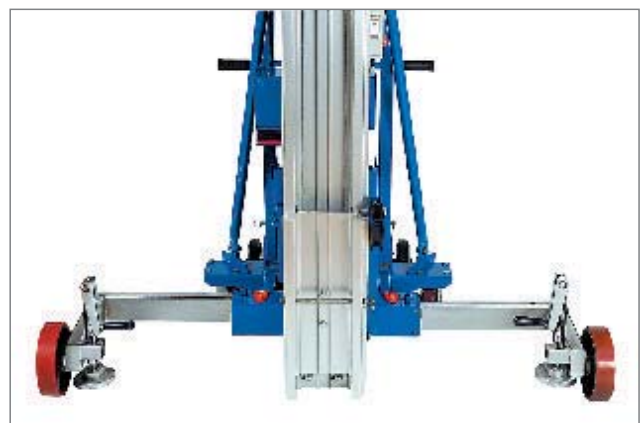

## GLASS LIFTER-GL



Cable under steel crankbase and crane lifting point for safe transportation.



Variable wheelbase chassis with 2 lifting screw and spirit level for usage on a sloping surface.



Counter weight  
4 x 22.5 kg



Steel pulleys with upper ring



Removable battery protected in a steel housing with quick connector.



Roller fairlead for the steel cable



Easy tip of the mast for easy Horizontal or vertical transport.



Radio remote control with emergency stop



Cable remote control with 5 m cable

## GLASS LIFTER-GL

### Standard accessory:



#### ◎GL-U

##### Universal Crane arm:

Patented Universal Crane arm with universal swivel design.

- ◆ Retractable and foldable, available to carry out installations.
- ◆ Works around 300~600 mm scope.
- ◆ Loading capacity 300 kg.
- ◆ Weight 18 kg.

### Optional accessory :



#### ◎GL- 3 V

##### Hanging crane for front glazing

- ◆ Loading capacity 165 kg.
- ◆ With 3 vacuum suction cups on flexible angle control.
- ◆ Easy to lift the glass from the floor or from a wall
- ◆ Dimensions: 1450 x 537 mm
- ◆ Weight: 18 kg



#### ◎GL 4 V

##### Universal cradle for roof and front glazings

- ◆ Load capacity 180 kg.
- ◆ With 4 vacuum suction cups design with 360° rotation, possible to be fixed at any position.
- ◆ No limit to a height space overhead.
- ◆ Dimension: 1460 x 454 mm.
- ◆ Weight: 27 kg.

1. **Quick Folding base:** Brand new quick folding base, easy and convenient set up in 10 secs without any tools.
2. Thanks to a special design, possible to set up on an uneven terrain. It can also be set up on a slope to accomplish the level set up.
3. **Electrical operating:** optional with two different motors.  
**DC motor:** optional with Radio control with two quick charge device.  
**AC motor:** optional with Radio control with quick charge device.
4. **Raised Limited switch off device:** equipped with Raised Limited switch off device, if raised to high, it will switch off the power for safety protection.  
 Reset the Raised limited switch: Press both the UP button and the Raised limited switch to reset the power.
5. **10" Heavy duty casters** make it easy to move on any job site.